

# CT-17-1000.GB



Highly compact, high-speed, electrically driven radial turbo compressor with gas bearing for the circulation and compression of various gases and refrigerants.


- High-speed gas bearings for oil free operation
- Lowest ratio of volume and weight versus pressure and mass flow due to highest speeds
- Aerodynamic and electromagnetic optimization for highest total efficiency
- Compatible to converter CC-120-1000 or CC-230-3500
- Integrated temperature measurement for overload protection



## Specifications turbo compressor


Maximum pressure ratio	1.65
Maximum mass flow	24 g/s
Isentropic overall efficiency $\eta_{tot}$	59 %
Rated speed (active cooling)	280'000 rpm
Rated power	1'000 W
Weight	1.5 kg

## Drawing (in mm)

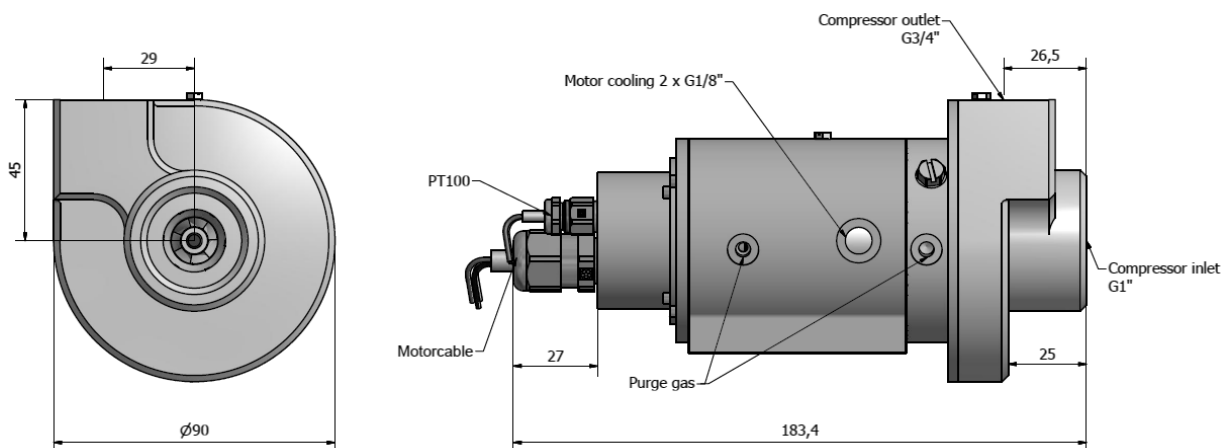


## Compressor maps: overpressure operation

Pressure ratio versus mass flow

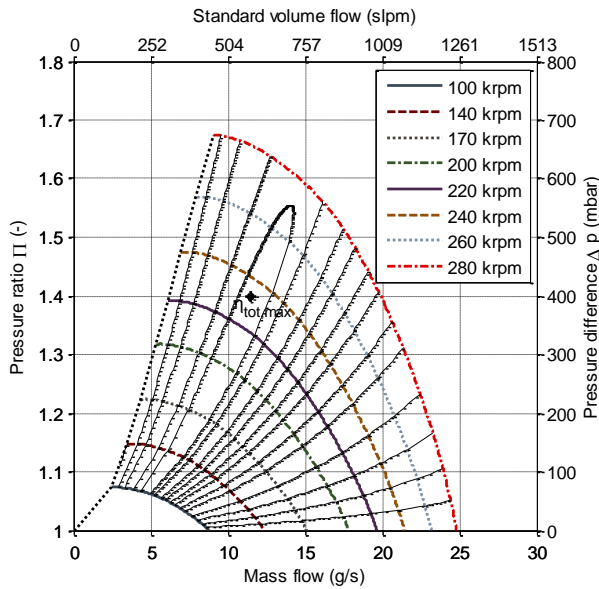

Compressor input power versus mass flow

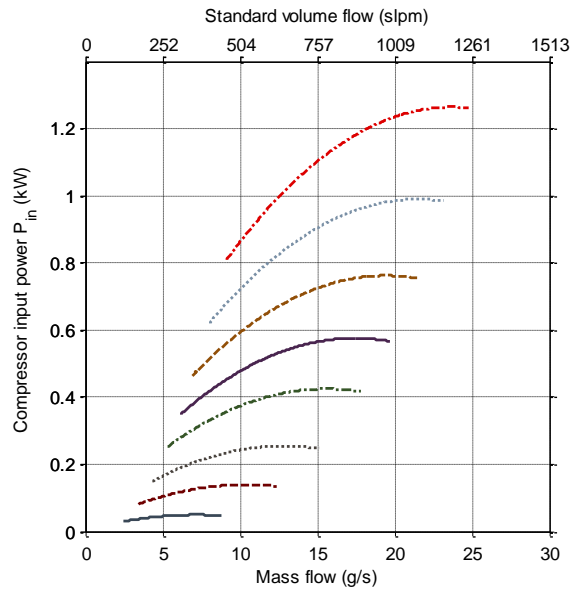


The specifications and compressor maps in this datasheet for overpressure operation refer to air (ISO 8778) at the inlet: temperature:  $T = 293.15\text{ K} = 20^\circ\text{C}$ , pressure:  $p_{in} = 1\text{ bar}$ .


For technical details and further information please refer to the user's manual.

## Compressor maps: vacuum operation

Pressure ratio versus mass flow

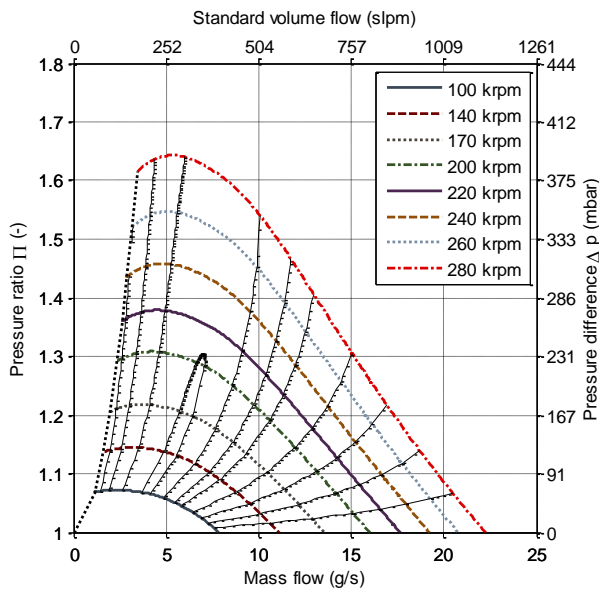

Compressor input power versus mass flow

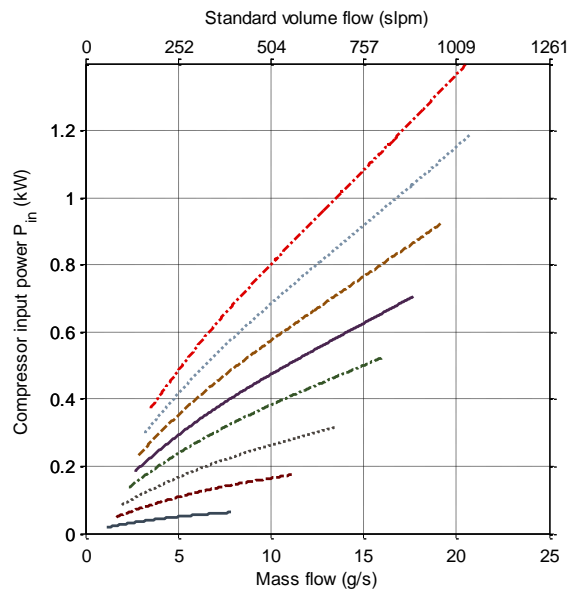

**Order codes: CT-17-1000.GBxx.Wxx**

### Bearing options GBxx

GB01 Air bearing at ISO 8778 inlet conditions

GB99 Custom specific gas bearing (inlet conditions and / or gas, etc.)

### Winding options Wxx

W01 Standard winding

### Accessories

Damper set for mounting in mobile application

$\eta_{tot} = \eta_{is} * \eta_m$  : isentropic overall efficiency

$\eta_{is}$  : isentropic compressor efficiency

$\eta_m$  : motor efficiency

### Celeroton AG

Industriestrasse 22  
CH-8604 Volketswil

Tel.: +41 44 250 52 20  
Fax: +41 44 250 52 29

info@celeroton.com  
www.celeroton.com

© Celeroton AG. All rights reserved.