

**Liquid cooled Switched Reluctance Drive SRKM-10T-15N-10kW-400V
with integrated electronic unit.**







Power supply voltage	3 phase AC 50Hz 400V $\pm 10\%$
Rated current	16A
Maximum current	22A
Nominal power	10kW
Max power	15kW
Rated speed:	10 000 rpm
Speed range	6000 – 13 000 rpm
Nominal torque	9,6 Nm
Maximum torque	15 Nm
Inertia moment	0,005kg.m ²
Protection class	IP66
Control interface	CAN
IEC protection class	Class1
Winding insulation class	H
Cooling type	Water-cooled
Cooling water operating temperature range	+5 – +35°C
Working temperature range	+5 – +50°C
Storage temperature range	-40 – +60°C
Weight	19 kg
Size	277,5 x 295 x 295mm

The Drive is protected against overload and overheating.



KASKOD-MTRONIX

www.kaskod.com mail: info@kaskod.ee

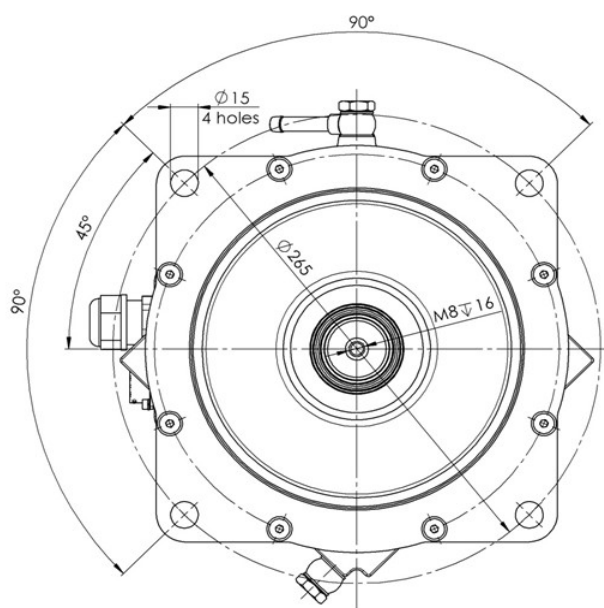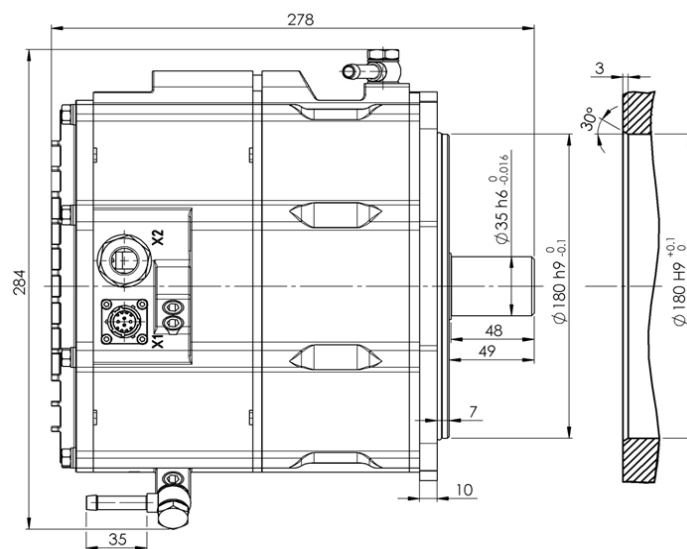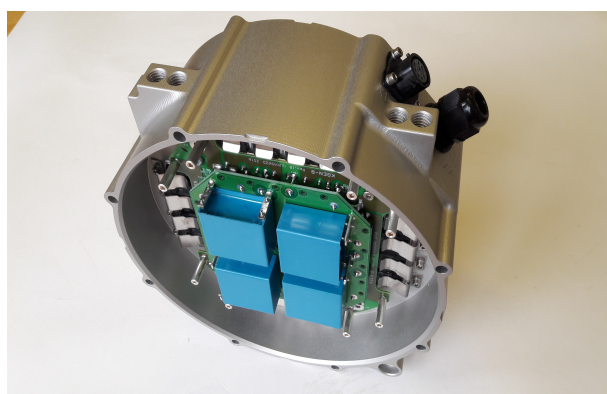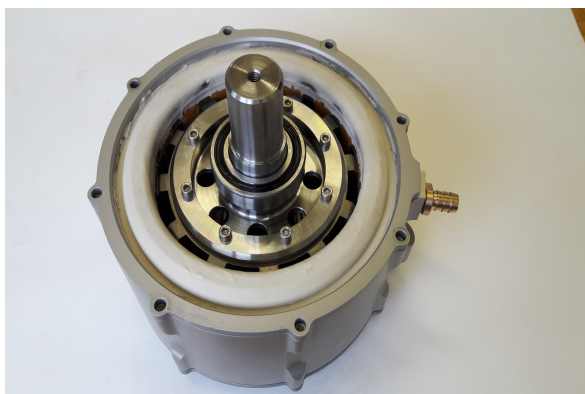

KASKOD-MTRONIX

www.kaskod.com mail: info@kaskod.ee

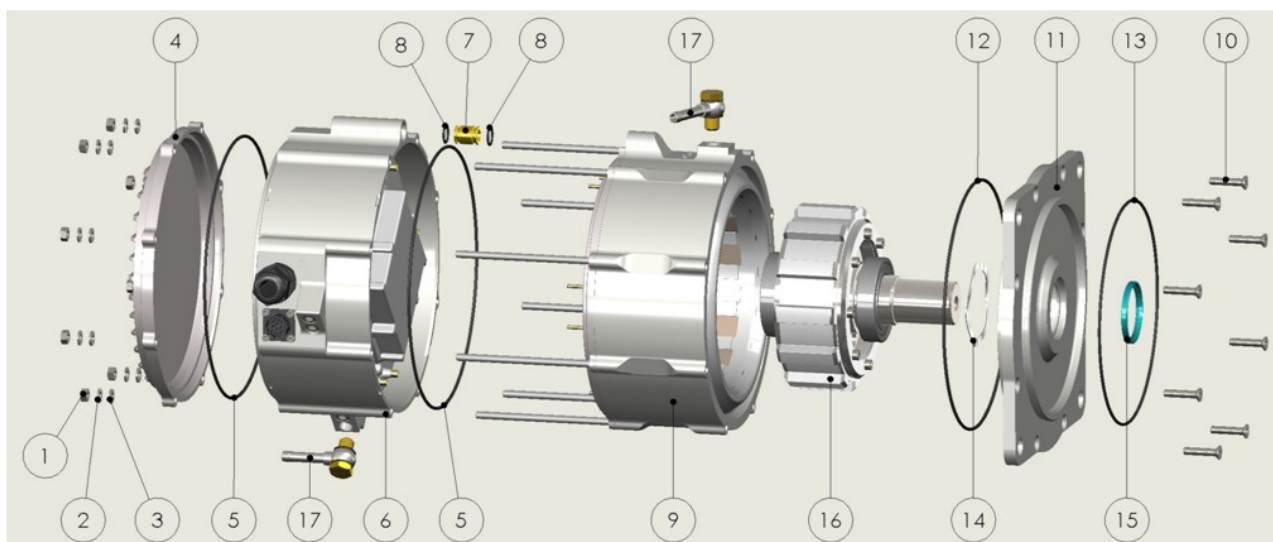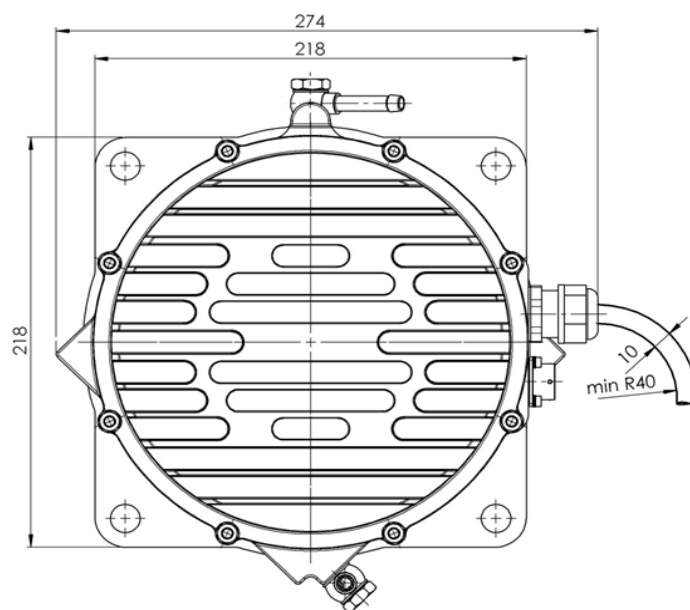

KASKOD-MTRONIX

www.kaskod.com mail: info@kaskod.ee